

RENDERING EQUIPMENT

ANCO



**CONTINUOUS
HYDROLYZERS**



ABOUT US

ANCO KNOWS RENDERING

Founded in 1902, ANCO has continued to innovate and hone our expertise in the manufacturing of quality rendering equipment for over a century.

Today, our product line and production capabilities have doubled in size, and we maintain an inventory of replacement parts to ensure you have little to no downtime.

This is what we do, but why we do it makes all the difference.

Our ultimate goal is to be your long-lasting, collaborative partner. We will work with you to find the best solution for your rendering needs, whether that's implementing a new system, or working with your existing equipment. Our equipment transforms organic waste into something purposeful, so we have a positive impact on our environment.

Our longevity makes us experts, but our customer care makes us the right partner. We look forward to working with you.



SYSTEMS SOLUTIONS SPARES

PRODUCT IN

100+
COUNTRIES

100+ YEARS

For over a century, ANCO has been providing quality, dependable products to fit any need within the rendering industry.

- BINS & TANKS
- SHREDDERS & GRINDERS
- COOKERS & HYDROLYZERS
- DRYERS
- SEPARATORS
- PRESSES
- VAPOR HANDLING
- ODOR CONTROL
- PUMPS & CONVEYORS
- PLC & HMI AUTOMATION

SPARE PARTS

ANCO is determined to provide critical spare parts to ensure your plant runs smoothly and without downtime.

OUR COMMITMENT


Providing exceptional customer service with fast turnaround, deep industry knowledge and long-term partnerships.

Offering full system control with automation using the latest PLC and HMI color touch screen functionality.

PROUDLY MADE IN THE USA



- Processes poultry feathers and animal hair
- Consumes one pound of steam for every three pounds of raw material
- Discharges feather moisture content in the 59±% range
- Raises product quality and protein digestibility due to the rapid heating and short residence time inside the vessel
- Automation controls with dynamic incremental position discharge valve to maintain proper internal pressure during the continuous hydrolyzing processing
- SS inner shell with CS jacket, high R value solid insulation and SS cover
- ASME Code - Pressure Vessel 516-70 materials
- Standard packing seals, optional mechanical seals

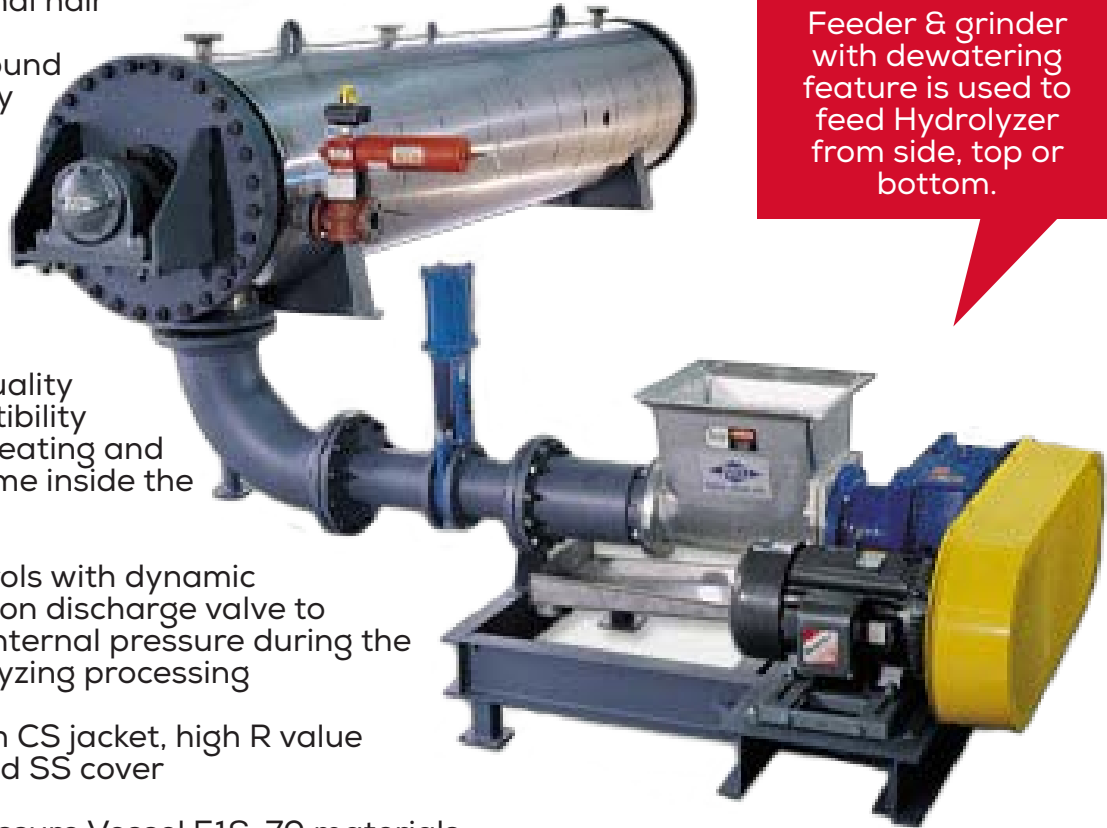

Feeder & grinder with dewatering feature is used to feed Hydrolyzer from side, top or bottom.

Take advantage of our pre-piped valve package to simplify installation. We offer full system control with automation using the latest PLC and HMI color touch screen functionality.

MODEL	CAPACITY		DIMENSIONS						WEIGHT		FEEDER/ AGITATOR OR POWER	
			LENGTH		WIDTH		HEIGHT					
	PPH	KGPH	FT	M	FT	M	FT	M	LBS	KG	HP	KW
1212-05	5,000	2,300	20	6.1	7	2.1	10	3.0	18,000	8,182	40/15	30/11
1212-10	10,000	4,550	24	7.3	7	2.1	10	3.0	22,000	10,000	50/15	30/11
1212-15	15,000	6,800	25	7.6	8	2.4	10	3.0	28,000	12,700	60/20	45/15
1212-20	20,000	9,100	26	7.9	8	2.4	12	3.7	32,000	14,600	75/20	55/15
1212-30	30,000	13,600	30	9.1	9	2.7	12	3.7	39,000	17,700	125/30	90/22

BOTTOM FEED & TOP FEED OPTIONS AVAILABLE UPON REQUEST

**PROVIDERS OF
SOLUTIONS,
SYSTEMS
& SPARES
FOR OVER 100 YEARS**



www.ancorendering.com | 336.855.7800
1420 Lorraine Ave. | High Point, NC 27263